




VANDALPROOF METAL CABINET LOUDSPEAKER

SENTRY6/RTC


Installation instructions

You can cable this unit via either the cable hole in the back of the unit or by using the 20mm cable entries at the top of the back box. Secure the back box to a flat surface using the fixing holes provided.


Measurement: mm

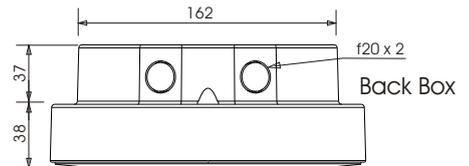

Top View




Isogonal View



Front View

Once you have brought the cable through the back box, terminate to the ceramic block and select the required power setting, See circuit diagram . Slot the speaker plate under the retaining lug "A" and locate speaker into the back box. Tighten the grub screw "B" to secure the unit in place.



Circuit diagram

